

NOVA™

Crystalline PV Module

CHSM6610M (BL) Series

- ▶ With innovational 4-busbar cells
- ▶ All black, especially for the rooftop

270	275	280	285	290
-----	-----	-----	-----	-----

EN

ELECTRICAL SPECIFICATIONS						
STC rated output (P_{mpp})*	270 Wp	275 Wp	280 Wp	285 Wp	290 Wp	
PTC rated output (P_{mpp} **)	247.9 Wp	252.6 Wp	257.3 Wp	262.0 Wp	266.8 Wp	
Standard sorted output	0/+5 Wp					
Warranted power output STC ($P_{nominal}$)	270 Wp	275 Wp	280 Wp	285 Wp	290 Wp	
Rated voltage (V_{mpp}) at STC	30.70 V	31.10 V	31.48 V	31.80 V	32.15 V	
Rated current (I_{mpp}) at STC	8.80 A	8.84 A	8.91 A	8.97 A	9.03 A	
Open circuit voltage (V_{oc}) at STC	38.12 V	38.36 V	38.83 V	39.15 V	39.45 V	
Short circuit current (I_{sc}) at STC	9.29 A	9.38 A	9.41 A	9.46 A	9.54 A	
Module efficiency	16.5%	16.9%	17.2%	17.5%	17.8%	
Rated output (P_{mpp}) at NOCT	198.4 Wp	202.1 Wp	205.8 Wp	209.4 Wp	213.1 Wp	
Rated voltage (V_{mpp}) at NOCT	28.26 V	28.64 V	28.95 V	29.27 V	29.58 V	
Rated current (I_{mpp}) at NOCT	7.02 A	7.06 A	7.11 A	7.16 A	7.20 A	
Open circuit voltage (V_{oc}) at NOCT	35.36 V	35.58 V	36.02 V	36.32 V	36.60 V	
Short circuit current (I_{sc}) at NOCT	7.47 A	7.54 A	7.57 A	7.61 A	7.67 A	
Temperature coefficient (P_{mpp})	- 0.380%/K				Maximum system voltage (UL/IEC)	1000 Vdc
Temperature coefficient (I_{sc})	+0.042%/K				Number of diodes	6 (or 3)
Temperature coefficient (I_{mpp})	- 0.008%/K				Maximum series fuse rating	15 A
Temperature coefficient (V_{mpp})	- 0.373%/K					
Temperature coefficient (V_{oc})	- 0.284%/K					
Normal operating cell temperature (NOCT)	46±2°C					

* Measurement tolerance +/- 3%
 ** Estimated



RELATED PARAMETERS

Cell type	Monocrystalline
Number of cells / cell arrangement	60 / 6 x 10
Cells dimension	6"
Packing unit	30 modules
Weight of packing unit (for container)	598 kg / 1318 lbs

QUALIFICATION AND LINEAR WARRANTIES


Product standard	IEC 61215, 61730 / UL 1703
Extended product warranty	10 years
Output decline 3%/year performance P _{mpp} (STC)	1 st year
Output decline 0.7%/year performance P _{mpp} (STC)	2 nd ~ 25 th years

MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1648 x 990 x 35 mm 64.88 x 38.98 x 1.38 in
Frame technology	Aluminum, black anodized
Module composition	Glass / EVA / Backsheet (black)
Weight (module only)	18.3 kg / 40.34 lbs
Front glass thickness	3.2 mm / 0.13 in
Junction box IP rating	IP 67
* Cable length(UL/IEC)	1000 mm / 39.37 in
Cable diameter (UL/IEC)	12 AWG / 4 mm ²
Maximum load capacity	5400 Pa
Fire performance (UL/IEC)	Type 1 (UL) or Class C (IEC)
Connector type (UL/IEC)	MC4 compatible

* Option: 900(+)/600(-) mm for defined projects in advance.

Linear Performance Warranty

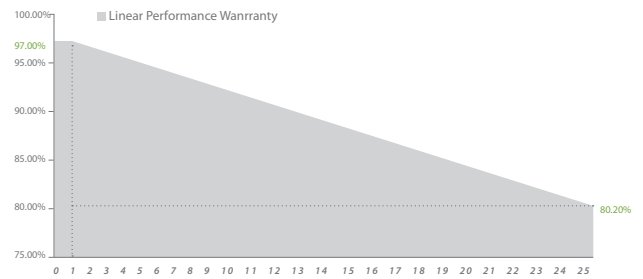

MODULE DIMENSION DETAILS

Front view	Side view	Rear view	Frame cross section

© Chint Solar (Zhejiang) Co., Ltd. Reserves the right of final interpretation. Specifications and designs included in this datasheet are subject to change without notice.